


Application

Pipeline bow-type drop cable is composed of bow-type drop cable in the inside, water-blocking tape, aluminum-plastic laminated tape and PE outer sheath on the outside.

Product application:

Outdoor duct launching

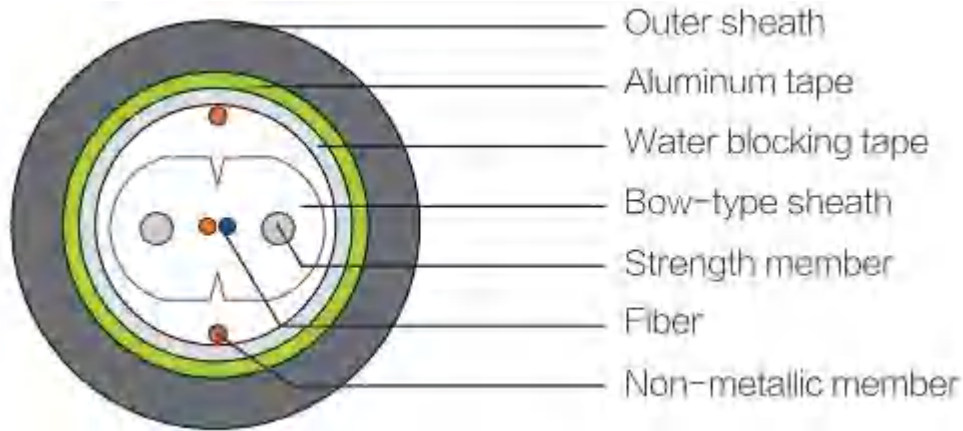

Structural parameters

Fiber count	Cable diameter (mm)	Cable weight (kg/km)	Minimum bending radius		Tensile load		Crush load (N/100mm)		Temperature range (t)
			static	dynamic	Short	Long term	Short term	Long term	
1	7.0	35.1	70	140	600	200	1000	500	-20°C-+60°C
2	7.0	35.2	70	140	600	200	1000	500	-20°C-+60°C
4	7.0	35.3	70	140	600	200	1000	500	-20°C-+60°C